

HVAC System Calculator Results

Eu - PUHZ Series

Outdoor Unit: PUZ-ZM100YDA2

Cooling Performance

6.20

SEER (Seasonal Energy Efficiency Ratio)

A++

9.5 kW

Heating Performance

4.30

SCOP (Seasonal Coefficient of Performance)

A+

7.8 kW

Annual Energy Consumption

528

kWh/year (Cooling)

2,524

kWh/year (Heating)

3,052

kWh/year (Total)

Sound Levels


63 dB(A)

Outdoor Unit

63 dB(A)

Indoor Unit

EU Energy Label

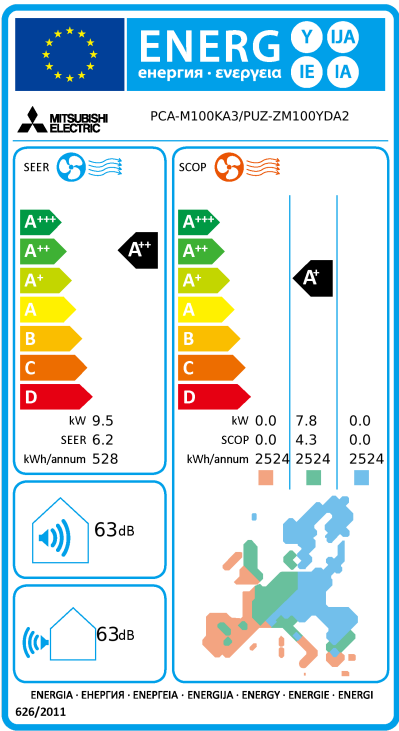

Product Data Fiche

A	Model	C	Outdoor unit	PUZ-ZM100YDA2				
		B	Indoor unit 1	PCA-M100KA3				
			Indoor unit 2	-				
			Indoor unit 3	-				
			Indoor unit 4	-				
			Indoor unit 5	-				
			Indoor unit 6	-				
D	Sound power level, indoors/outdoors	F	Outside	dB(A)	63			
		E	Inside 1	dB(A)	63			
			Inside 2	dB(A)	-			
			Inside 3	dB(A)	-			
			Inside 4	dB(A)	-			
			Inside 5	dB(A)	-			
			Inside 6	dB(A)	-			
G	Refrigerant			R32 GWP 675				
H	Cooling	SEER			6.20			
		J	Energy efficiency class			A++		
		K	Annual energy consumption	kWh/annum	528			
		L	Design load	kW	9.5			
				Warmer	Average	Colder		
M	Heating	SCOP			0.00	4.30	0.00	
		J	Energy efficiency class			×	A+	×
		K	Annual electricity consumption			-	2524	-
		L	Design load			-	7.8	-
		N	Declared capacity	P	at reference design temperature	×(×°C)	7.8(-10°C)	×(×°C)
				R	at bivalent temperature	×(×°C)	7.8(-10°C)	×(×°C)

				S	at operation limit temperature	×(×°C)	5.8(-20°C)	×(×°C)
		T	Back up heating capacity			×	0.0	×

	Deutsch Français Nederlands Español	Italiano Ελληνικά Português Dansk	Svenska Česky Slovensky Magyar	Polski Slovensko Български Română	Eesti Gaeilge Latviski Türkçe Lietuvių k.	Malti Suomi Türkçe Hrvatski	Русский Norsk Українська
Ⓐ	Modell Modèle Model Modelo	Modello Μοντέλο Modelo Modelo	Model Modelo Model Model	Model Model Model Model	Model Dėbanamh Modelis Modelis	Mudel Maali Model Model	Модель Modell Модель
Ⓑ	Innengerät Appareil intérieur Binnenunit Unidad interior	Unità interna Εσωτερική μονάδα Unidade interior Indersersenhed	Inomhusenhet Vnitřní jednotka Vnitřní jednotka Beltéri egység	Jednostka wewnętrzna Notranja enota Внутренний блок Unitate de interior	Siseseade Aonad laistigh Iekšējais ierīce Patalpoje montuojamas įrenginys	Unità għal ġewwa Sisäyksikkö Ic ünite Unutarnja jedinica	Внутренний прибор Innendärsenhet Внутренний блок
Ⓒ	Außengerät Modèle extérieur Buitenunit Unidad exterior	Unità esterna Εξωτερική μονάδα Unidade exterior Utdensersenhed	Utomhusenhet Vnější jednotka Vonkajšia jednotka Kültéri egység	Jednostka zewnętrzna Zunanja enota Внешний блок Unitate de exterior	Välisseade Aonad lasmuigh Ārtelpas ierīce Laure montuojamas įrenginys	Unità għal barra Ulkoyksikkö Diş ünite Vanjska jedinica	Наружный прибор Utdensersenhet Зонный блок
Ⓓ	Schalleistungspegel im Kühl- modus Niveaux de puissance corrects en mode de refroidissement Geluids-niveaus in koelstand Niveles de potencia del sonido en el modo de refrigeración	Livelli di potenza sonora in modal- ità di raffreddamento Επίπεδα ισχύος ήχου στην κατάσταση ψύξης Níveis de potência sonora em modo de arrefecimento Lydstyrkeniveauer i kølefunktion	Buileimivä i nedkylningsläget Úrovň hlukosti v režimu chlazení Hladiny akustického výkonu v režime chladienia Hangnyomásszintek hűtés üzem- ködésben	Poziom mocy dźwięku w trybie chłodzenia Ravni zvočne moči v načinu hlajenja Нива на звуковата мощност в режим на охлаждане Nivel sonor în modul de răcire	Müratasemed jahutusrežiimis Leibhéil chumhachta faime ar mhodh fuairthe Akustiskās jaudas līmenis dzēsēšanas režīmā Garso galios lygis vėsavimo režimu	Livelli tal-gawwa tal-hsejjes fil- modalità tat-tkessih Āanenvoimakkustastot viilen- nystilassa Soğutma modunda ses güç düzeyleri Razine zvučnog tlaka pri hlajenju	Значения уровня звуковой мощности в режиме охлаждения Lydstryknivåer i avkøjlingsmodus Рівні звукової потужності у режимі охолодження
Ⓔ	Innen À l'intérieur Binnenkant Interior Außen À l'extérieur Buitenkant Exterior	Interno Εσωτερικό Interior Indvendig Innen Εξωτερικό Exterior Udvendig	Insida Uvnitř Vo vnútri Bent Utsida Venku Vonku A szabadban	Wewnątrz Znotraj Вътре Interior Na zewnątrz Zunaj На открыто Exterior	Sees Laistigh Iekšējās Vidinis Väljas Lasmuigh Ārtelpā Išorinis	Ġewwa Sisäpuoli Iç taraf Unutra Barra Ulko puoli Diş taraf Vani	Внутри Inwendig Усредини Снаружи Utvendig Назовні

	Deutsch Français Nederlands Español	Italiano Ελληνικά Português Dansk	Svenska Česky Slovensky Magyar	Polski Slovensko Български Română	Eesti Gaeilge Latviski Türkçe Lietuvių k.	Malti Suomi Türkçe Hrvatski	Русский Norsk Українська
Ⓐ	Kühlmittel Réfrigérant Koelmiddel Refrigerante	Refrigerante Ψυκτικό Refrigerante Kølemiddel	Köldmedel Chladivo Chladivo Hűtőközeg	Czynnik chłodniczy Hladilno sredstvo Хладилен агент Refrigerent	Kūlmatusagens Cuisneán Aukstumaģents Saldais	Refrigerant Kylmäaine Soğutucu Rashladno sredstvo	Хладагент Kjølemedium Холодагент
Ⓑ	Kühlen Refroidissement Koelen Refrigeración	Raffreddamento Ψύξη Arrefecimento Køling	Kyla Chlazení Chladienie Hűtés	Chłodzenie Hlajenje Охлаждане Răcire	Jahutus Fuarú Dzēsēšana Vēsināmas	Tkessih Villennys Soğultma Hladenie	Охлаждение Avkjøling Охлаждения
Ⓒ	Energieeffizienzklasse Classe d'efficacité énergétique Energie-efficiëntieklasse Clase de eficiencia energética	Classe di efficienza energetica Κλάση ενεργειακής απόδοσης Classe de efficacité énergétique Energieeffektivitetsklasse	Energiklass Třída energetické účinnosti Trieda energetickej účinnosti Energiatátrósági osztály	Klasa energetyczna Razred energetske učinkovitosti Клас на енергийна ефективност Clasă de eficiență energetică	Energiatõhususe klass Aaine eifeachtúlachta fuinnimh Energieeffektivitātes klase Enerģijas vartojimo efektyvumo klasė	Klassi tal-effiċjenza fl-użu tal- enerġija Energielehtokkuusluokka Enerji verimlilik sınıfı Klasa energetske učinkovitosti	Клас ефективності использования энергии Energieeffektivitetsklasse Клас ефективності енергоспоживання
Ⓓ	Jahresstromverbrauch *2 Consommation d'électricité an- nuelle *2 Jaarlijks elektriciteitsverbruik *2 Consumo anual de electricidad *2	Consumo annuale di energia elettrica *2 Ετήσια κατανάλωση ρεύματος *2 Consumo anual de electricidade *2 Årligt elförbruk *2	Årlig strömförbrukning *2 Roční spotřeba elektrické energie *2 Ročná spotreba elektriny *2 Éves áramfogyasztás *2	Zużycie prądu w skali roku *2 Letna poraba elektrike *2 Годишня консумация на електроенергия *2 Consum anual de electricitate *2	Aastane voolutarbimus *2 Idigi leictrachais bhliantúil *2 Gada elektroenerģijas patēriņš *2 Motinis elektros energijos suva- tojimas *2	Konsum annwll tal-eletriku *2 Vuotainen sähkönkulutus *2 Yitlik elektrik tüketimi *2	Годовое потребление электроэнергии *2 Årlig strømförbruk *2 Річне споживання електроенергії *2
Ⓔ	Lastauslegung Charge de calcul Ontwerpbelasting Carga de diseño Heizen (Jahresdurchschnitt) Chauffage (moyenne saison) Verwarmen (gemiddeld seizoen)	Carico nominale Σχεδιασμός φόρτισης Carga nominal Brugslast Riscaldamento (stagione media) Θέρμανση (Μέσο χρονικό διάστημα) Aquecimento (Média estação)	Dimensionerande belastning Jmenovitě zatížení Projektované zaťaženie Mértézési terhelés Värme (genomsnittlig årtid) Topení (průměrná sezóna) Vykurovanie (Priemerná sezóna)	Maksymalne obciążenie Nazivna obremenitev Projektovan tovar Sarcină nominală Ogrzewanie (średnie temperatury) Otopljenje (Srednji sezon) Incălzire (sezon mediu)	Projekteeritud koormus Lõd deartha Aprékina slodze Projektinė apkrova Kūtinne (keskmīne hooaeg) Tēamh (meānsāsūrs) Šildīšana (vidējī sezonā) Šildīšanas (vidutinio sezono)	Tagħbija tad-disinn Laskettu kuormitus Tasarnm yükü Težina uređaja Tishin (Stagun medju) Lämmitys (vuodenajan keskiarvo) Zagrijavanje (prosječna sezona)	Расчетная нагрузка Utformingsbelastning Розрахунок навантаження Нагрев (средний сезон) Orpvarming (gjennomsnittlig årstid) Опалення (у середній/теплий сезон)
Ⓖ	Nennkapazität Capacité déclarée Aangegeven capaciteit Capacidad declarada	Capacità dichiarata Δηλωμένη χωρητικότητα Capacidade declarada Erklæret kapacitet	Deklarerad kapacitet Ukázaná kapacita Deklarovaný výkon Névtleges teljesítmény	Deklarowana pojemność Prijavljena zmogljivost Объявляемая мощность Capacitate declarată	Deklarētais vārdums Declaratā jauda Névtleges teljesítmény Capacitate declarată	Kapacitā deklarēta Ilmoitettu teho Bayan edilen kapasite Doklamları kapasitet	Гарантированная мощность Erklæret kapasitet Гарантована потужність
Ⓗ	bei angegebener Referenztem- peratur à la température de calcul de référence bij referentiewerptemperatuur a temperatura de diseño de referencia bei bivalenten Temperatur à température bivalente bij bivalente temperatuur a temperatura bivalente	alla temperatura di progetto di riferimento σε θερμοκρασία σχεδιασμού αναφοράς à temperatura nominal de refer- ència ved brugsafhængig referencetem- peratur alla temperatura bivalente σε θερμοκρασία δισθενοῦς Λειτουργίας à temperatura bivalente ved bivalent temperatur	vid dimensionerande referenstem- peratur při referenční výpočtové teplotě pri referenčnej výpočtovej teplote tervezési referencia- hőmérsékleten vid bivalent temperatur při bivalentní teplotě pri bivalentnej teplote bivalens hőmérsékleten vid drifttemperaturs gränsvärde při teplotě na hranici provozního limitu pri hraničnej prevádzkovej teplote ved driftsgrænsetemperatur maximális üzemi hőmérsékleten	w znanomowej temperaturze odniesienia ob referenční nazivní temperaturi pri izračunljivi projektnej temperaturi la temperatura de referință nominală w temperaturze bivalentnej bivalentse temperatuuri juures la temperatura de bivalent iőtőlamise piirtemperatuuri juures ag teocht teorann oibríocháin pri mejni delovni temperaturi la temperatura limită de funcționare Zapazowa pojemność grzewcza Tagavara küttevõimsus Kapacitā deklarēta Ilmoitettu teho Bayan edilen kapasite Doklamları kapasitet	projekteerimise võrdlustemperatu- uri juures ag teocht deartha tagartha aprékina references temperatūrā esant norminei projektinei temperatūrai bivalentse temperatuuri juures esant perėjimo į dvejopo šildymo režimą temperatūrai la temperatura de bivalent iőtőlamise piirtemperatuuri juures ag teocht teorann oibríocháin pri mejni delovni temperaturi la temperatura limită de funcționare Zapazowa pojemność grzewcza Tagavara küttevõimsus Kapacitā deklarēta Ilmoitettu teho Bayan edilen kapasite Doklamları kapasitet	ltemperatura tad-disinn ta' referenza perusmitoitulämpötilassa referans tasarnm sicalığında pri referentnoj temperaturi ltemperatura bivalenti kaksiarvoisessa lämpötilassa iki değeri sicalıkta pri bivalentnoj temperaturi ltemperatura tal-limitu tal-ħaddim	при эталонной расчетной температуре ved referansetemperatuur for utforming При эталонной розрахунковій температурі при бивалентной температуре ved bivalent temperatur При бивалентній температурі при предельной рабочей температуре ved temperatur for driftsgrænse При граничній робочій температурі
Ⓖ	bei Temperatur an der Betriebs- grenze à température de fonctionnement limite bij grens werkingstemperatuur a temperatura limite de func- ționament Backup-Heizleistung Capacité de chauffage d'appoint Reserveverwarmingcapaciteit Capacidad de calefacción auxiliar	alla temperatura limite di funzio- namento σε θερμοκρασία ορίου λειτουργίας limite à temperatura de limite de fun- cionamento ved driftsgrænsetemperatur Capacitā de riscaldamento ad- dizionale Kapacitāt rezervvārme Kapacitā záložního vytápění Výkon záložného vykurovacieho telesu Capacitate de încălzire de siguranță	vid drifttemperaturs gränsvärde při teplotě na hranici provozního limitu pri hraničnej prevádzkovej teplote ved driftsgrænsetemperatur maximális üzemi hőmérsékleten Kapacitāt rezervvārme Kapacitā záložního vytápění Výkon záložného vykurovacieho telesu Capacitate de încălzire de siguranță	w granicznej temperaturze roboczej pri mejni delovni temperaturi la temperatura limită de funcționare Zapazowa pojemność grzewcza Tagavara küttevõimsus Kapacitā deklarēta Ilmoitettu teho Bayan edilen kapasite Doklamları kapasitet	lőőlamise piirtemperatuuri juures ag teocht teorann oibríocháin pri mejni delovni temperaturi la temperatura limită de funcționare Zapazowa pojemność grzewcza Tagavara küttevõimsus Kapacitā deklarēta Ilmoitettu teho Bayan edilen kapasite Doklamları kapasitet	ltemperatura tad-disinn ta' referenza perusmitoitulämpötilassa referans tasarnm sicalığında pri referentnoj temperaturi ltemperatura bivalenti kaksiarvoisessa lämpötilassa iki değeri sicalıkta pri bivalentnoj temperaturi ltemperatura tal-limitu tal-ħaddim	Резервная тепловая мощность Sikkerhetskapasitet for orpvarm- ing Резервна тепла потужність

Product Information (*1)

INDOOR MODEL 1/2/3	PCA-M100KA3 / - / -
INDOOR MODEL 4/5/6	- / - / -
OUTDOOR MODEL	PUZ-ZM100YDA2

Function (indicate if present)				
cooling			Y	
heating			Y	
Item	symbol	value		unit
Design load				
cooling	Pdesignc	9.5	kW	
heating/Average	Pdesignh	7.8	kW	
heating/Warmer	Pdesignh	×	kW	
heating/Colder	Pdesignh	×	kW	
Declared capacity for cooling, at indoor temperature 27(19)°C and outdoor temperature Tj				
Tj=35°C	Pdc	9.50	kW	
Tj=30°C	Pdc	7.00	kW	
Tj=25°C	Pdc	4.50	kW	
Tj=20°C	Pdc	4.40	kW	
Declared capacity for heating/Average season, at indoor temperature 20°C and outdoor temperature Tj				
Tj=-7°C	Pdh	6.90	kW	
Tj=2°C	Pdh	4.20	kW	
Tj=7°C	Pdh	2.70	kW	
Tj=12°C	Pdh	2.40	kW	
Tj=bivalent temperature	Pdh	7.80	kW	
Tj=operating limit	Pdh	5.80	kW	
Declared capacity for heating/Warmer season, at indoor temperature 20°C and outdoor temperature Tj				
Tj=2°C	Pdh	×	kW	
Tj=7°C	Pdh	×	kW	
Tj=12°C	Pdh	×	kW	
Tj=bivalent temperature	Pdh	×	kW	
Tj=operating limit	Pdh	×	kW	

Declared capacity for heating/Colder season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	Pdh	×	kW
Tj=2°C	Pdh	×	kW
Tj=7°C	Pdh	×	kW
Tj=12°C	Pdh	×	kW
Tj=bivalent temperature	Pdh	×	kW
Tj=operating limit	Pdh	×	kW
Tj=-15°C	Pdh	×	kW
Bivalent temperature			
heating/Average	Tbiv	-10	°C
heating/Warmer	Tbiv	×	°C
heating/Colder	Tbiv	×	°C
Operating limit temperature			
heating/Average	ToI	-20	°C
heating/Warmer	ToI	×	°C
heating/Colder	ToI	×	°C
Cycling interval capacity			
for cooling	Pcycc	×	kW
for heating	Pcyh	×	kW
Degradation co-efficient cooling	Cdc	0.25	
Electric power input in power modes other than 'active mode'			
off mode	POFF	25	W
standby mode	PSB	25	W
thermostat - off mode	PTO(c/h)	52 / 84	W
crankcase heater mode	PCK	0	W
Capacity control (indicate one of three options)			
fixed	N		
staged	N		
variable	Y		
If function includes heating: Indicate the heating season the information relates to. Include at least the heating season 'Average'.			
Average (mandatory)			Y
Warmer (if designated)			N
Colder (if designated)			N
Item	symbol	value	unit

Seasonal efficiency			
cooling	SEER	6.2	
heating/Average	SCOP/A	4.3	
heating/Warmer	SCOP/W	×	
heating/Colder	SCOP/C	×	
Declared energy efficiency ratio, at indoor temperature 27(19)°C and outdoor temperature Tj			
Tj=35°C	EERd	4.00	
Tj=30°C	EERd	5.60	
Tj=25°C	EERd	8.60	
Tj=20°C	EERd	10.20	
Declared coefficient of performance/Average season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	COPd	2.90	
Tj=2°C	COPd	4.35	
Tj=7°C	COPd	5.35	
Tj=12°C	COPd	6.55	
Tj=bivalent temperature	COPd	2.40	
Tj=operating limit	COPd	1.60	
Declared coefficient of performance/Warmer season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=2°C	COPd	×	
Tj=7°C	COPd	×	
Tj=12°C	COPd	×	
Tj=bivalent temperature	COPd	×	
Tj=operating limit	COPd	×	
Declared coefficient of performance/Colder season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	COPd	×	
Tj=2°C	COPd	×	
Tj=7°C	COPd	×	
Tj=12°C	COPd	×	
Tj=bivalent temperature	COPd	×	
Tj=operating limit	COPd	×	
Tj=-15°C	COPd	×	
Cycling interval efficiency			
for cooling	EERcyc	×	
for heating	COPcyc	×	
Degradation co-efficient heating	Cdh	0.25	

Annual electricity consumption			
cooling	QCE	528	kWh/a
heating/Average	QHE	2524	kWh/a
heating/Warmer	QHE	×	kWh/a
heating/Colder	QHE	×	kWh/a
Other items			
Sound power level (indoor model 1/2/3/4/5/6)	LWA	63/0/0/0/0/0	dB(A)
Sound power level (outdoor model)	LWA	63	dB(A)
Global warming potential	GWP (*2)	675	kgCO2eq.
Rated air flow (indoor model 1/2/3/4/5/6)		1680/-/-/-/-/-	m³/h
Rated air flow (outdoor model)		4800	m³/h
Contact details for obtaining more information	MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan E-mail: melshierp@MitsubishiElectric.co.jp		

(*1) This information is based on the "product information requirement" in COMMISSION REGULATION (EU) No206/2012.

(*2) This GWP value is based on Regulation(EU)No.517/2014 from IPCC 4th Assessment Report.

For Regulation (EU) No. 626/2011, which cites the IPCC Third Assessment Report, Climate Change 2001, the GWP is 550.

TECHNICAL DOCUMENTATION (1)

PACKAGED AIR CONDITIONER	INDOOR MODEL 1	PCA-M100KA3	H230 x W1600 x D680 mm
	INDOOR MODEL 2	-	
	INDOOR MODEL 3	-	
	INDOOR MODEL 4	-	
	INDOOR MODEL 5	-	
	INDOOR MODEL 6	-	
OUTDOOR MODEL	PUZ-ZM100YDA2	H870 x W1100 x D505 mm	

Function	
cooling	Y
heating	Y

The heating season	
Average (mandatory)	Y
Warmer (if designated)	N
Colder (if designated)	N

Capacity control	
fixed	N
staged	N
variable	Y

Item	symbol	value	unit
Seasonal efficiency (²)			
cooling	SEER	6.2	
heating/Average	SCOP/A	4.3	
heating/Warmer	SCOP/W	×	
heating/Colder	SCOP/C	×	

Energy efficiency class			
cooling	SEER	A++	
heating/Average	SCOP/A	A+	
heating/Warmer	SCOP/W	×	
heating/Colder	SCOP/C	×	

Other items			
Sound power level (indoor model 1/2/3/4/5/6)	LWA	63/0/0/0/0/0	dB(A)
Sound power level (outdoor model)	LWA	63	dB(A)
Refrigerant		R32	
Global warming potential	GWP ⁽³⁾	675	kgCO2eq.

Identification and signature of the person empowered to bind the supplier		Supplier Signature
	Kunihiro Morishita Department Manager, Quality Assurance Department MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO.,LTD	

(¹) This information is based on COMMISSION DELEGATED REGULATION (EU) No626/2011.

(²) SEER/SCOP values are measured based on EN 14825:2016: Testing and rating at part load conditions and calculation of seasonal performance.

(³) This GWP value is based on Regulation(EU)No.517/2014 from IPCC 4th Assessment Report. For Regulation (EU) No. 626/2011, which cites the IPCC Third Assessment Report, Climate Change 2001, the GWP is 550.